





Sole CS

Contract fabric

Width 138/ 140 cm
Weight 735 g/ ml
Composition 100% TREVIRA CS
Martindale > 50'000

(1/4)
















Sole CS

Contract fabric

Width 138/ 140 cm
Weight 735 g/ ml
Composition 100% TREVIRA CS
Martindale > 50'000

(2/4)




Sole CS


Contract fabric

Width 138/ 140 cm
Weight 735 g/ ml
Composition 100% TREVIRA CS
Martindale > 50'000

(3/4)




14




409



407



406




408



403




404




405




411




07



10



410



11

Sole CS

Data sheet

(4/4)

Piece length	50 m
Piece width	138/ 140 cm
Fabric weight	525 g/m ³ 735 g/ml
Dying	Yarn dyed
Weaving	Jacquard
Composition	100% TREVIRA CS

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	2118 (ISO13934-1)
Resistance to traction (weft)	2288 (ISO13934-1)
Breaking strenght longation (warp)	36.5 (ISO13934-1)
Breaking strenght longation (weft)	41.5 (ISO13934-1)
Resistance to tearing (warp)	220 (ISO13937-3)
Resistance to tearing (weft)	217 (ISO13937-3)
Seam slipping resistance (warp)	3 (ISO13936-2)
Seam slipping resistance (weft)	5 (ISO13936-2)
Abrasion Martindale	> 50'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	4/5 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	4/5 (ISO12945-2)
Dimension change after warp	- 1.4% (ISO3175-2)
Dimension change after weft	- 0.3% (ISO3175-2)

Flammability	Classe1/ M1/ TB117-2013/ EN1021.1.2/ BS5852.0-1/ B1/ 1-IM/ NFPA 260/ IMO 7-8
--------------	---


Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--

Sole Plain

Contract fabric

Width 138/ 140 cm
Weight 735 g/ ml
Composition 100% TREVIRA CS
Martindale > 50'000

(1/3)













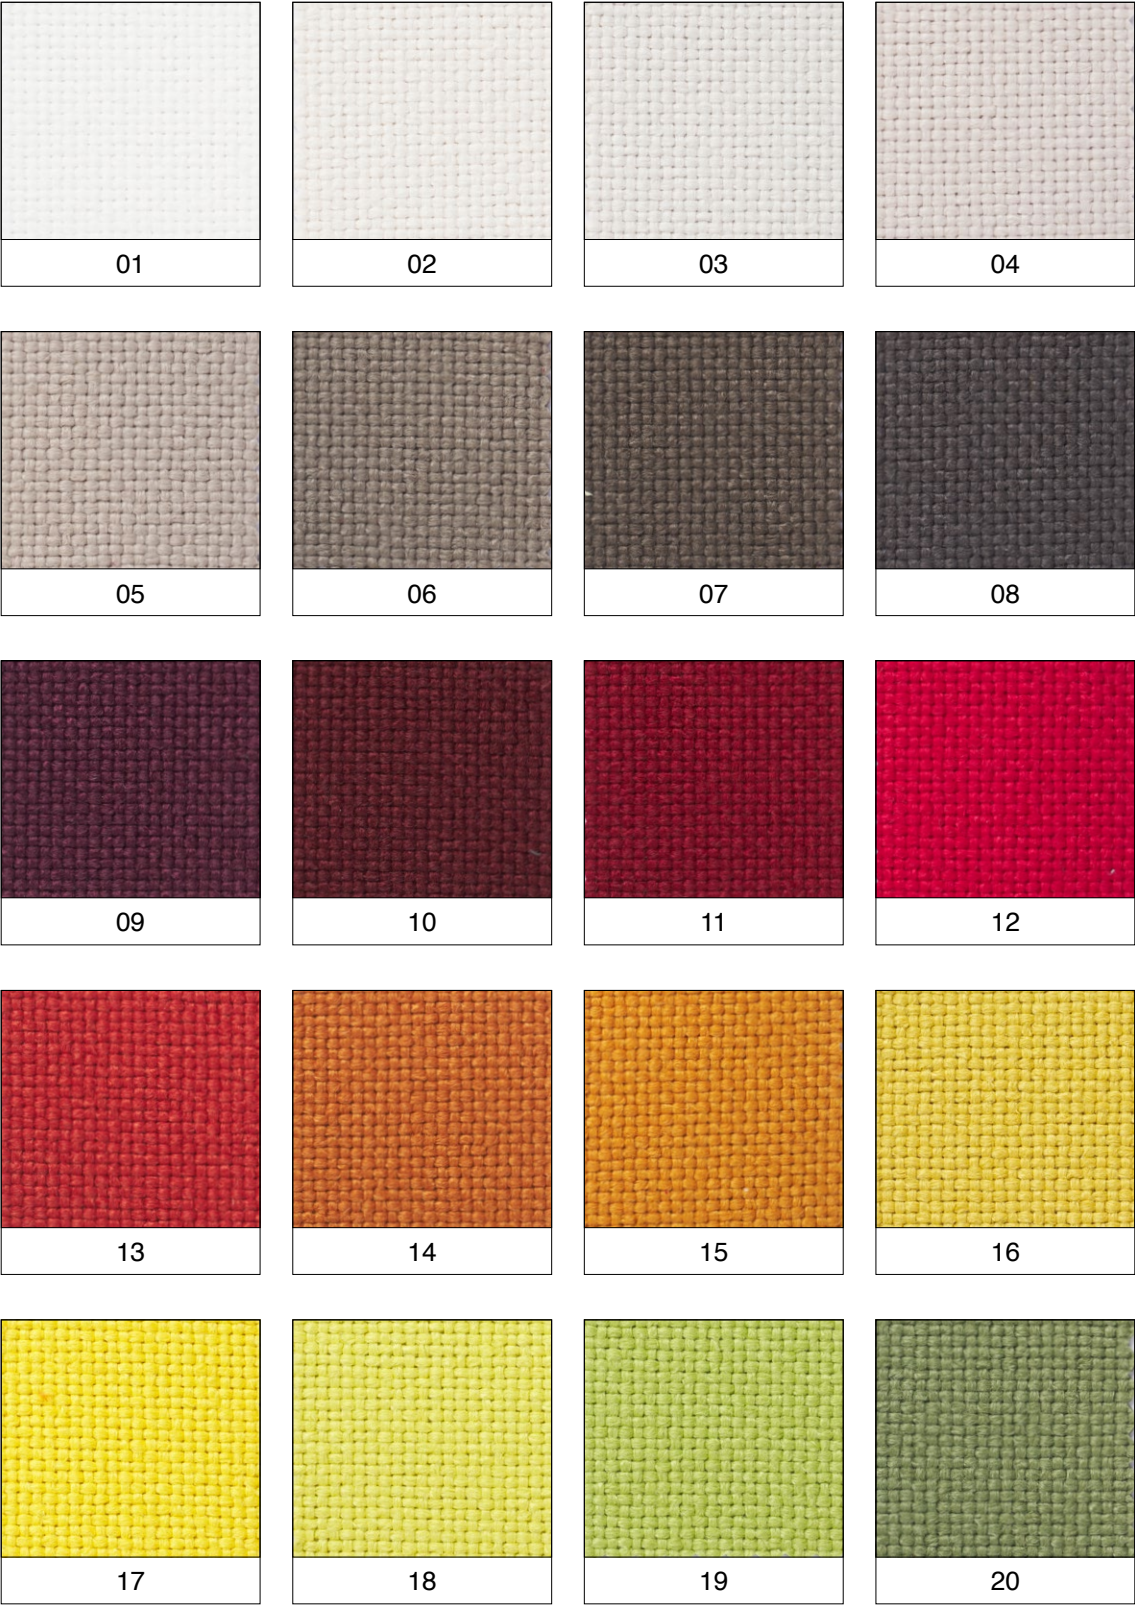


Sole Plain

Contract fabric

Width 138/ 140 cm
Weight 735 g/ ml
Composition 100% TREVIRA CS
Martindale > 50'000

(2/3)



Sole Plain

Data sheet

(3/3)

Piece length	50 m
Piece width	138/ 140 cm
Fabric weight	525 g/m ² 735 g/ml
Dying	Piece dyed
Weaving	Velvet
Composition	100% TREVIRA CS

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	2118 (ISO13934-1)
Resistance to traction (weft)	2288 (ISO13934-1)
Breaking strenght longation (warp)	36.5 (ISO13934-1)
Breaking strenght longation (weft)	41.5 (ISO13934-1)
Resistance to tearing (warp)	220 (ISO13937-3)
Resistance to tearing (weft)	217 (ISO13937-3)
Seam slipping resistance (warp)	3 (ISO13936-2)
Seam slipping resistance (weft)	5 (ISO13936-2)
Abrasion Martindale	> 50'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	4/5 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	4/5 (ISO12945-2)
Dimension change after warp	- 1.4 % (ISO3175-2)
Dimension change after weft	- 0.3 % (ISO3175-2)

Flammability	Classe1/ M1/ TB117-2013/ EN1021.1.2/ BS5852.0-1/ B1/ 1-IM/ NFPA 260/ IMO 7-8
--------------	---

Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--

Eskimo

Contract fabric

Width 138/ 140 cm
Weight 924 g/ ml
Composition 100% TREVIRA CS
Martindale 170'000

(1/2)



Eskimo

Data sheet

(2/2)

Piece length	25 m
Piece width	138/ 140 cm
Fabric weight	650 g/m ² 924 g/ml
Dying	Yarn dyed
Weaving	Jacquard
Composition	100% TREVIRA CS

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	1819 (ISO13934-1)
Resistance to traction (weft)	1399 (ISO13934-1)
Breaking strenght longation (warp)	32 (ISO13934-1)
Breaking strenght longation (weft)	123.9 (ISO13934-1)
Resistance to tearing (warp)	106 (ISO13937-3)
Resistance to tearing (weft)	506 (ISO13937-3)
Seam slipping resistance (warp)	2.3 (ISO13936-2)
Seam slipping resistance (weft)	1.7 (ISO13936-2)
Abrasion Martindale	170'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	4 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	4 (ISO12945-2)
Dimension change after warp	- 1.5% (ISO3175-2)
Dimension change after weft	+ 1.6% (ISO3175-2)

Flammability	Classe 1-IM/ DIN 4102-B1/ TB117-2013/ EN1021-1-2
	NFPA 260-2019/ M1/ IMO 8

















Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--

Shirley

Contract fabric

Width 138/ 140 cm
Weight 728 g/ ml
Composition 100% TREVIRA CS
Martindale 96'000

(1/3)




Shirley

Contract fabric

Width 138/ 140 cm
Weight 728 g/ ml
Composition 100% TREVIRA CS
Martindale 96'000

(2/3)



68/22




99/24




01/25



19/26




19/28



99/29



04/31



99/32

Shirley

Data sheet

(3/3)

Piece length	25 m
Piece width	138/ 140 cm
Fabric weight	520 g/m ³ 728 g/ml
Dying	Yarn dyed
Weaving	Jacquard
Composition	100% TREVIRA CS

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	1005 (ISO13934-1)
Resistance to traction (weft)	1376 (ISO13934-1)
Breaking strenght longation (warp)	18.8 (ISO13934-1)
Breaking strenght longation (weft)	22.7 (ISO13934-1)
Resistance to tearing (warp)	101 (ISO13937-3)
Resistance to tearing (weft)	182 (ISO13937-3)
Seam slipping resistance (warp)	4 (ISO13936-2)
Seam slipping resistance (weft)	4 (ISO13936-2)
Abrasion Martindale	96'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	4 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	3/4 (ISO12945-2)
Dimension change after warp	- 1.9% (ISO3175-2)
Dimension change after weft	- 1.9% (ISO3175-2)

Flammability	UNI 9175 Classe 1-IM/ Cert. Trevira DIN 4102 B1/ California TB117- 2013/ C&M EN1021-1-2 C&M BS5852.0.1/ NFPA 260-2019/ IMO 7-8/ BS5852-Crib 5 (treathed)
--------------	--



Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--

Knot

Contract fabric

Width 138/ 140 cm
Weight 952 g/ ml
Composition 70% WO, 24% CO, 6% PL
Martindale > 100'000

(1/2)



Knot

Data sheet

(2/2)

Piece length	25 m
Piece width	138/ 140 cm
Fabric weight	680 g/m ³ 952 g/ml
Dying	Yarn dyed
Weaving	Jacquard
Composition	70% WO, 24% CO, 6% PL

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	1173 (ISO13934-1)
Resistance to traction (weft)	651 (ISO13934-1)
Breaking strenght longation (warp)	39.9 (ISO13934-1)
Breaking strenght longation (weft)	17.4 (ISO13934-1)
Resistance to tearing (warp)	245 (ISO13937-3)
Resistance to tearing (weft)	135 (ISO13937-3)
Seam slipping resistance (warp)	2 (ISO13936-2)
Seam slipping resistance (weft)	2 (ISO13936-2)
Abrasion Martindale	> 100'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	4/5 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	4/5 (ISO12945-2)
Dimension change after warp	n.a. (ISO3175-2)
Dimension change after weft	n.a. (ISO3175-2)

Flammability	TB117:2013/ BS5852.0.1 (C&M)/ EN 1021.1.2 (C&M)/ Classe 1-IM
	BS 5852 Crib 5 (With coating)














Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--

Everest

Contract fabric

Width 138/ 140 cm
Weight 735 g/ ml
Composition 75% WO, 15% WP, 10% PA
Martindale 130'000

(1/3)



Everest


Contract fabric

Width 138/ 140 cm
Weight 735 g/ ml
Composition 75% WO, 15% WP, 10% PA
Martindale 130'000

(2/3)



699



608



601/2



601/3



601/4

Everest

Data sheet

(3/3)

Piece length	30 m
Piece width	138/ 140 cm
Fabric weight	525 g/m ² 735 g/ml
Dying	Yarn dyed
Weaving	Jacquard
Composition	75% WO, 15% WP, 10% PA

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	769 (ISO13934-1)
Resistance to traction (weft)	937 (ISO13934-1)
Breaking strenght longation (warp)	25 (ISO13934-1)
Breaking strenght longation (weft)	31.5 (ISO13934-1)
Resistance to tearing (warp)	114 (ISO13937-3)
Resistance to tearing (weft)	121 (ISO13937-3)
Seam slipping resistance (warp)	3 (ISO13936-2)
Seam slipping resistance (weft)	3 (ISO13936-2)
Abrasion Martindale	130'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	3/4 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	3/4 (ISO12945-2)
Dimension change after warp	n.a. (ISO3175-2)
Dimension change after weft	n.a. (ISO3175-2)

Flammability n.a.

Cleaning instructions Spotstaining with spray detergent dry cleaning

Garland

Contract fabric
Width 138/ 140 cm
Weight 609 g/ ml
Composition 100% TEVIRA CS
Martindale 80'000



(1/3)



Garland

Contract fabric
Width 138/ 140 cm
Weight 609 g/ ml
Composition 100% TEVIRA CS
Martindale 80'000


(2/3)




01/23




58/30




01/25



19/26



99/31



01/32

Garland

Data sheet

(3/3)

Piece length	25 m
Piece width	138/ 140 cm
Fabric weight	435 g/m ³ 609 g/ml
Dying	Yarn dyed
Weaving	Jacquard
Composition	100% TREVIRA CS

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	1040 (ISO13934-1)
Resistance to traction (weft)	1238 (ISO13934-1)
Breaking strenght longation (warp)	22 (ISO13934-1)
Breaking strenght longation (weft)	24.5 (ISO13934-1)
Resistance to tearing (warp)	105 (ISO13937-3)
Resistance to tearing (weft)	114 (ISO13937-3)
Seam slipping resistance (warp)	1 (ISO13936-2)
Seam slipping resistance (weft)	1.7 (ISO13936-2)
Abrasion Martindale	80'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	4/5 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	4/5 (ISO12945-2)
Dimension change after warp	- 1.8% (ISO3175-2)
Dimension change after weft	- 1.1% (ISO3175-2)

Flammability	UNI 9175 Classe 1-IM/ Cert. Trevira DIN 4102 B1/ California TB117-
	2013/ C&M EN1021-1-2/ C&M BS5852.0.1/ NFPA 260-2019/
	IMO 7-8 / BS7176

Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--








Luna CS

Contract fabric

Width 138/ 140 cm
Weight 650 g/ ml
Composition 100% TREVIRA CS
Martindale 190'000

(1/3)



 01	 319	 1714	 707
 702	 1713	 28	 1712
 1715	 315	 1716	 1717
 316	 1711	 1718	 317
 22	 23	 1702	 25

Luna CS

Contract fabric

Width 138/ 140 cm
Weight 650 g/ ml
Composition 100% TREVIRA CS
Martindale 190'000

(2/3)



Luna CS

Data sheet

(3/3)

Piece length	35 m
Piece width	138/ 140 cm
Fabric weight	470 g/m ³ 650 g/ml
Dying	Piece dyed
Weaving	Velvet
Composition	100% TREVIRA CS

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	1400 (ISO13934-1)
Resistance to traction (weft)	942 (ISO13934-1)
Breaking strenght longation (warp)	32.5 (ISO13934-1)
Breaking strenght longation (weft)	25 (ISO13934-1)
Resistance to tearing (warp)	54 (ISO13937-3)
Resistance to tearing (weft)	30 (ISO13937-3)
Seam slipping resistance (warp)	1.6 (ISO13936-2)
Seam slipping resistance (weft)	2.6 (ISO13936-2)
Abrasion Martindale	190'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	n.a. (ISO12945-2)
Pilling 5'000 rubs(Martindale)	n.a. (ISO12945-2)
Dimension change after warp	+/- 1% (ISO3175-2)
Dimension change after weft	+/- 1% (ISO3175-2)

Flammability	Classe1/ M1/ TB117-2013/ EN1021.1.2 / BS5852.0-1/ B1
	IMO 7-8/ Classe 1-IM/ NFPA 260:2019

Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--





Roxana

Contract fabric

Width 138/ 140 cm
Weight 630 g/ ml
Composition 100% TREVIRA CS
Martindale 180'000

(1/3)










 02	 03	 1720	 1715
 33	 04	 1709	 1708
 08	 18	 19	 17
 11	 1201	 12	 1726
 16	 1001	 111	 1722

Roxana

Contract fabric

Width 138/ 140 cm
Weight 630 g/ ml
Composition 100% TREVIRA CS
Martindale 180'000

(2/3)



Roxana

Data sheet

(3/3)

Piece length	35 m
Piece width	138/ 140 cm
Fabric weight	450 g/m ² 630 g/ml
Dying	Piece dyed
Weaving	Velvet
Composition	100% TREVIRA CS

Pattern repeat horizontal (cm)	//
Pattern repeat vertical (cm)	//

Resistance to traction (warp)	1070 (ISO13934-1)
Resistance to traction (weft)	1183 (ISO13934-1)
Breaking strenght longation (warp)	21.5 (ISO13934-1)
Breaking strenght longation (weft)	25.5 (ISO13934-1)
Resistance to tearing (warp)	44 (ISO13937-3)
Resistance to tearing (weft)	28 (ISO13937-3)
Seam slipping resistance (warp)	1.8 (ISO13936-2)
Seam slipping resistance (weft)	3 (ISO13936-2)
Abrasion Martindale	180'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	n.a. (ISO12945-2)
Pilling 5'000 rubs(Martindale)	n.a. (ISO12945-2)
Dimension change after warp	- 0.4% (ISO3175-2)
Dimension change after weft	+ 0.2% (ISO3175-2)

Flammability	Classe1/ M1/ TB117-2013/ EN1021.1&2 (c&m)/ BS5852.0-1(c&m)/ B1/ IMO 7-8/ Classe 1-IM/ C&M BS5852.1.1979/ BS582 Crib 5 (With coating)/ EN1101-EN13773 Classe 1
--------------	---


Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--

Lama

Contract fabric

Width 138/ 140 cm
Weight 588 g/ ml
Composition 65% WO, 15% WP, 20% PA
Martindale 100'000

(1/3)






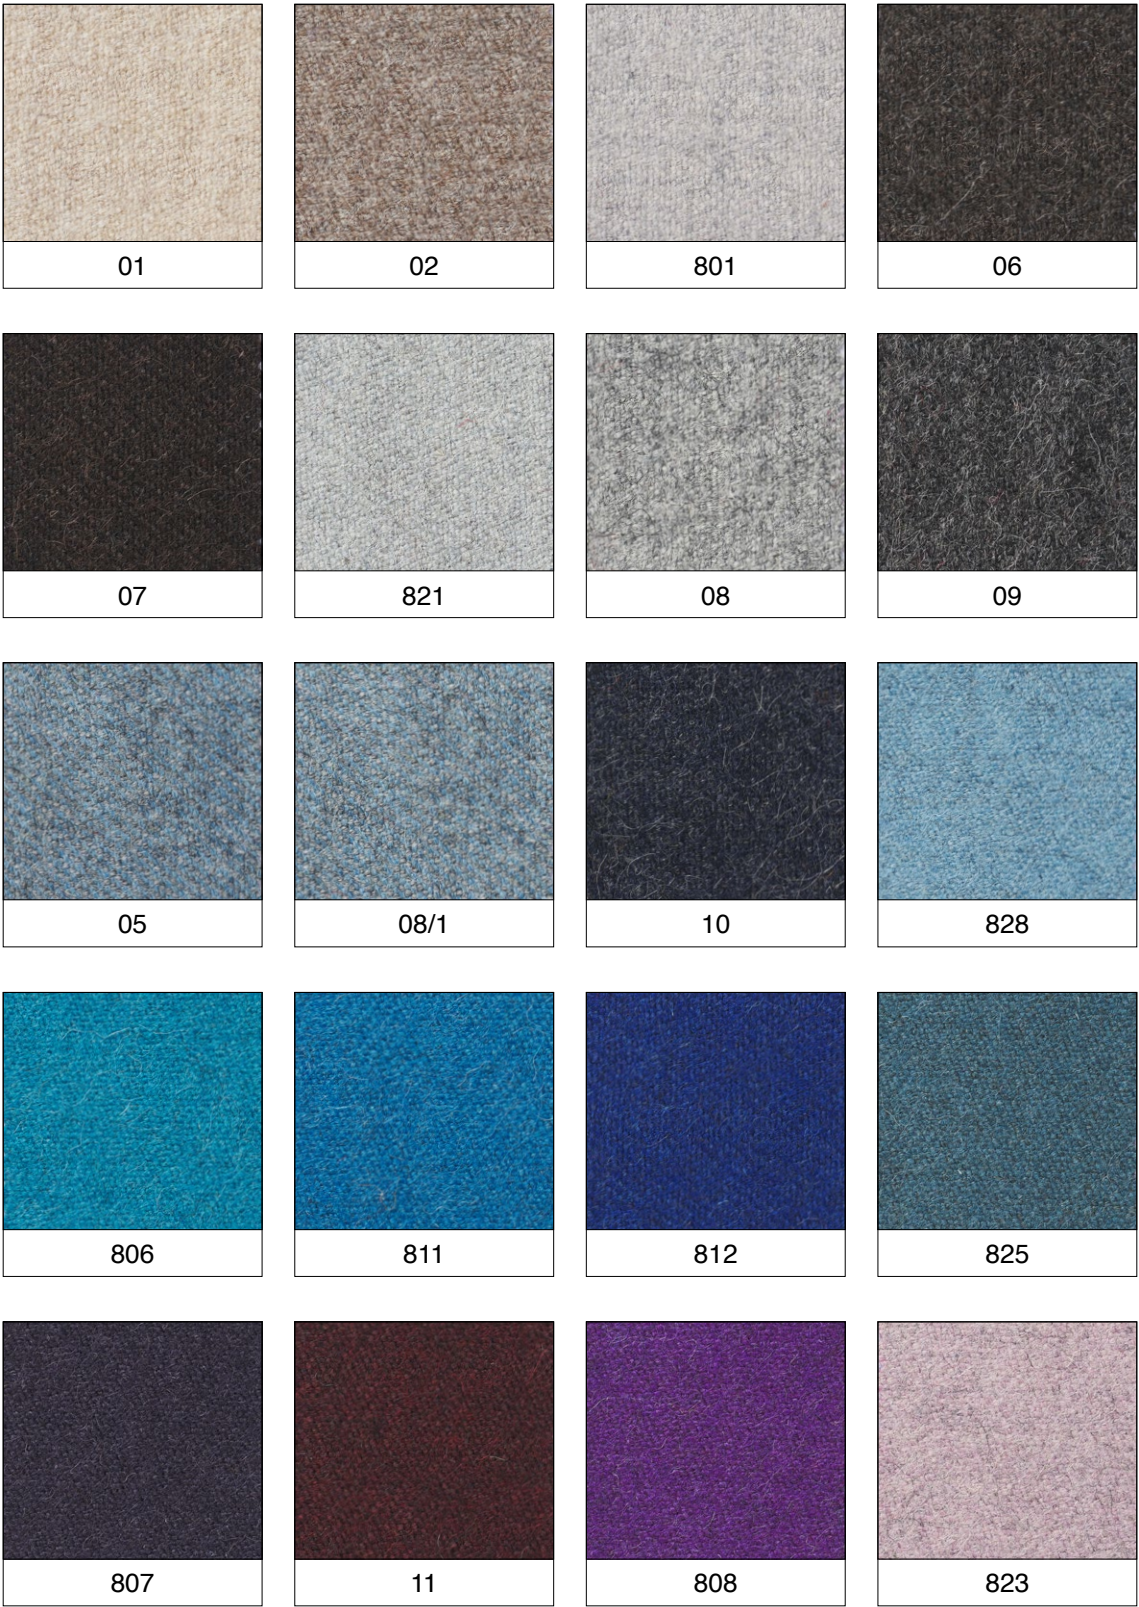


Lama

Contract fabric

Width 138/ 140 cm
Weight 588 g/ ml
Composition 65% WO, 15% WP, 20% PA
Martindale 100'000

(2/3)



Lama

Data sheet

(3/3)

Piece length	40/ 50 m
Piece width	138/ 140 cm
Fabric weight	420 g/m ² 588 g/ml
Dying	Yarn dyed
Weaving	Jacquard
Composition	65% WO, 15% WP, 20% PA

Pattern repeat horizontal (cm) //

Pattern repeat vertical (cm) //

Resistance to traction (warp)	700 (ISO13934-1)
Resistance to traction (weft)	55 (ISO13934-1)
Breaking strenght longation (warp)	40 (ISO13934-1)
Breaking strenght longation (weft)	30 (ISO13934-1)
Resistance to tearing (warp)	150 (ISO13937-3)
Resistance to tearing (weft)	100 (ISO13937-3)
Seam slipping resistance (warp)	>200N (ISO13936-2)
Seam slipping resistance (weft)	>200N (ISO13936-2)
Abrasion Martindale	100'000 (ISO12947-2)
Pilling 2'000 rubs (Martindale)	4 (ISO12945-2)
Pilling 5'000 rubs(Martindale)	3/4 (ISO12945-2)
Dimension change after warp	- 2.5% (ISO3175-2)
Dimension change after weft	- 2.5% (ISO3175-2)

Flammability	Classe 1-IM/ TB117:2013/ C&M EN 1021-1-2/ C&M BS5852-0-1/ NFPA 260:2013
--------------	--

Cleaning instructions	Spotstaining with spray detergent dry cleaning
-----------------------	--